


MANUFACTURED TO MEET OR EXCEED OE PERFORMANCE



DESIGNED ACCORDING TO STRICT MANUFACTURING STANDARDS AND RIGOROUSLY TESTED

- Three separate 48-64 hour vibration tests to ensure a long service life under the harshest conditions.
- Testing cycles from -40°F to 257°F to ensure optimal operation in extreme temperatures.
- Protection against short circuits and potential voltage issues to deliver precise performance and a long service life.

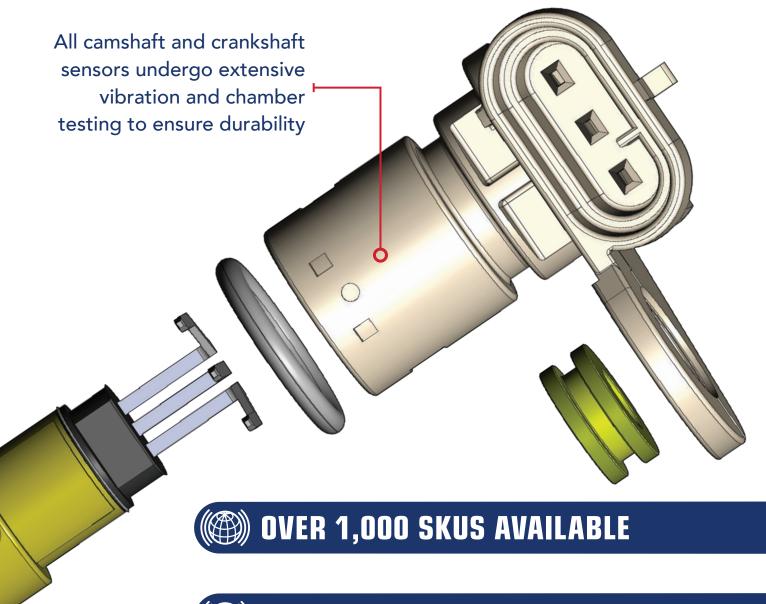

